



INSTALLATION INSTRUCTIONS

PART No.

FB25113

**Jeep® JL Wrangler
Luggage Rack**



REQUIRED TOOLS

6MM Allen
17MM Socket

KIT CONTAINS


Tub Rail Support Plate (Left & Right)
Center Cross Plate
M10 Bolt
M10 Nyloc Nut
M10 Flat Washer
Hard Top Knobs

QTY

1 ea
1
6
6
16
4

1) INSTALL THE SUPPORT PLATES

The orientation of the support plates can be determined by the location of the smaller, unbranded section.

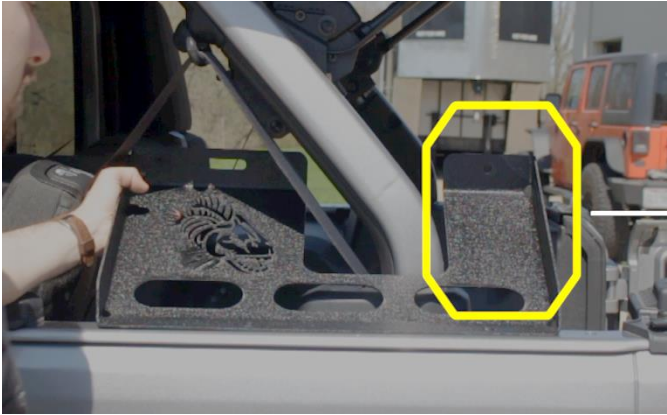

As shown above, this section will always face the rear of the vehicle, and the tub rail holes will cover your vehicle's (2) most rear rail holes.

Secure them with (2) of the included Hardtop Knobs lead by a Flat Washer.



Repeat on the opposite side.

2) INSTALL THE CENTER CROSS PLATE

With the Fishbone Offroad name plate facing the rear of the vehicle, raise the Cross Plate up and in

between the two Support Plates.



Secure each side with (3) Bolts, (6) Flat Washers, and (3) Nyloc Nuts.



Tighten down the bolts with a 17MM Socket and a 6MM Allen wrench.



3) ENJOY YOUR NEW FISHBONE OFFROAD LUGGAGE RACK!



INSTALLATION INSTRUCTIONS

PART No.

FB25113

**Jeep® JL Wrangler
Luggage Rack**

